


Model BT-2RCL





BTech's Model BT-2RCL transducer is a proven standard for underwater acoustic communication (AComms).

Specifications (Nominal):

- Resonance Frequency (f_r): 28 kHz
- Coupling Coefficient (k_{eff}): 0.33
- TVR at f_r : 141 dB re 1 μ Pa/V
- SPL (max) at f_r (@ 1 m): 197 dB re 1 μ Pa
- OCVS at f_r : -191 dB re 1 V/ μ Pa
- Horizontal Beam Pattern: Omnidirectional
- Vertical Beam Pattern: Toroidal
- Depth (max): 700 m
- Voltage (max): 600 Vrms
- Weight (in air, in water): 232 g (a), 83 g (w)





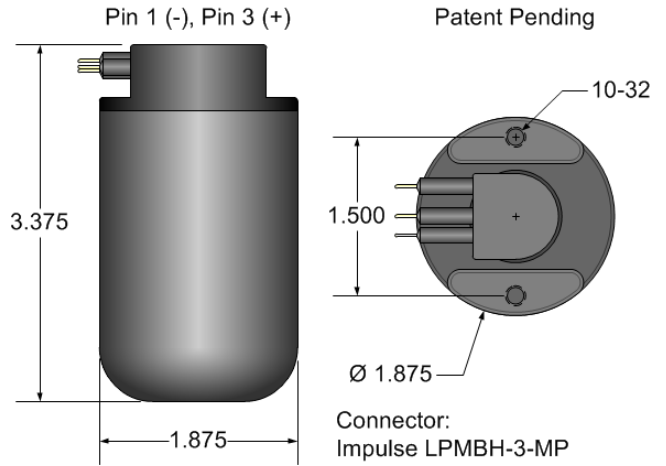


Performance Curves (Nominal):

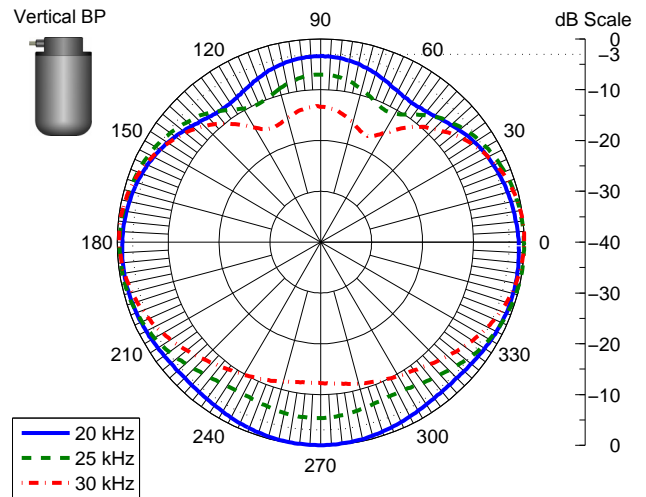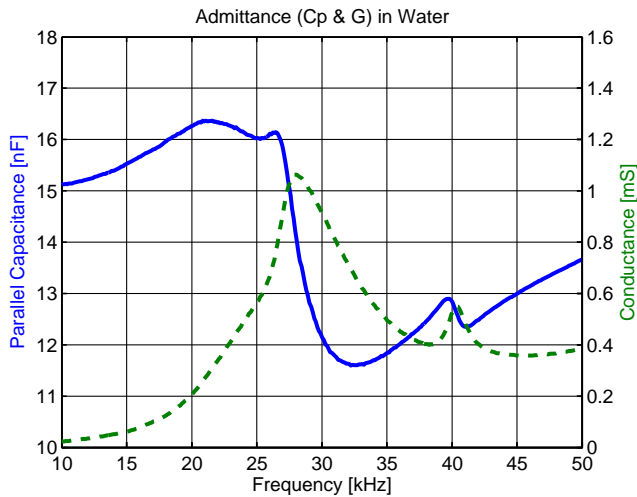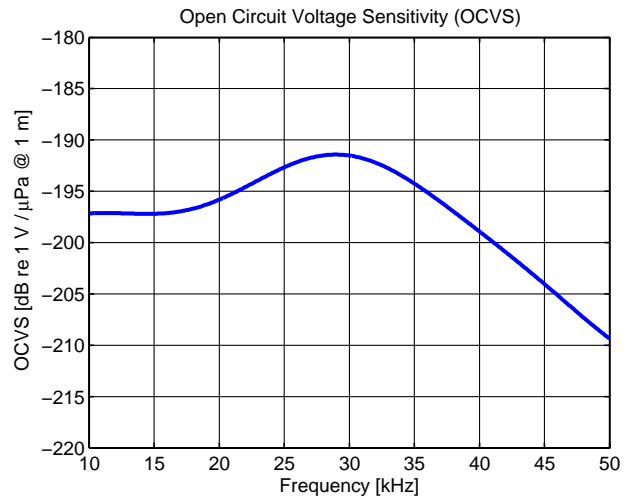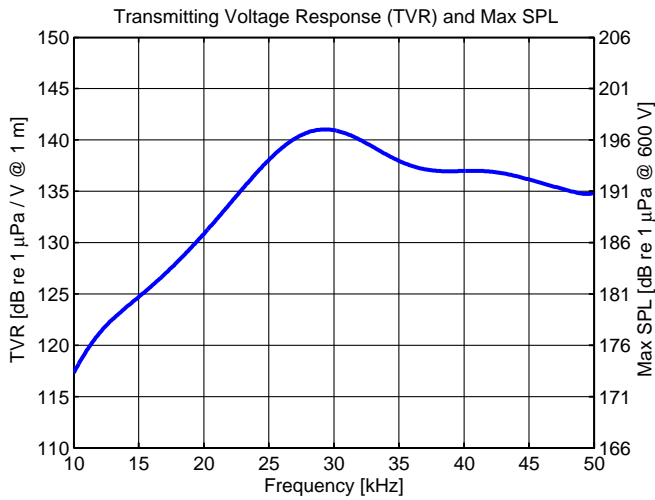

Model BT-2RCL

Tuned Performance Curves (Nominal):

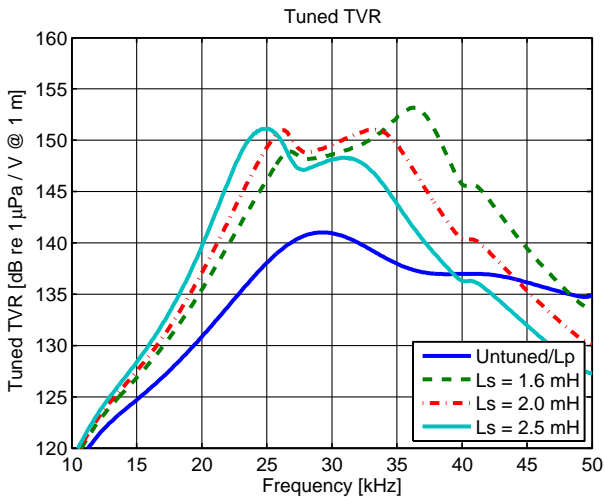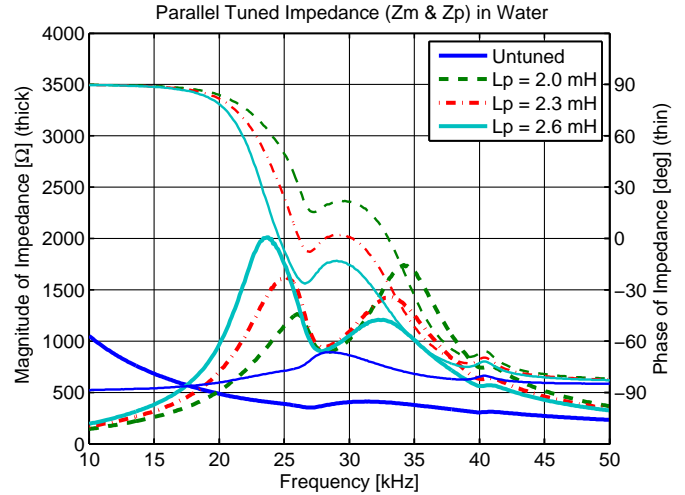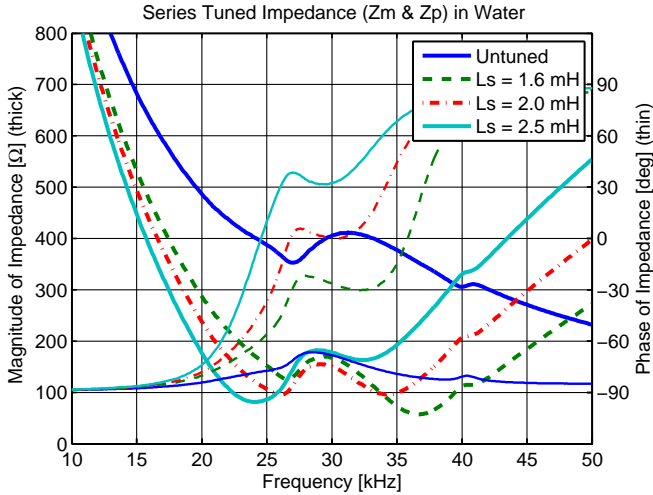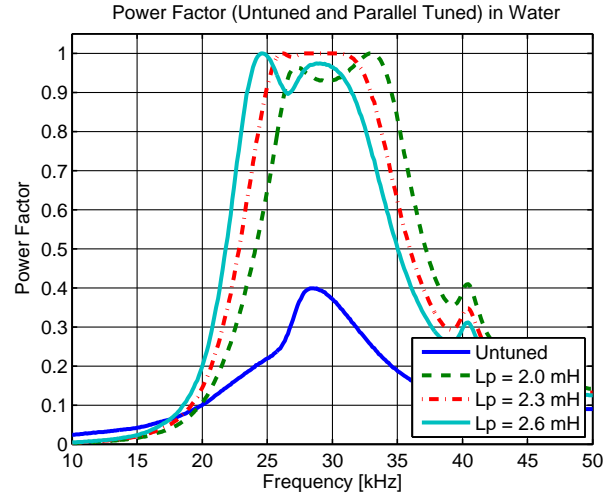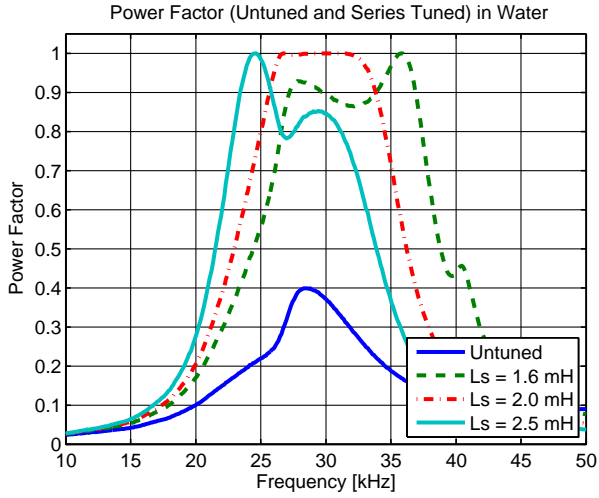

Tuning and Matching is required for highly effective power delivery to the transducer. The impact on system performance for several values of series and parallel inductive tuning elements are provided.

BTech has extensive modeling capabilities to optimize any system configuration for greater bandwidth and efficiency.

Contact us for customizable features, such as connector style, increased depth rating, and more...